





防爆軟管 Flexible Tube

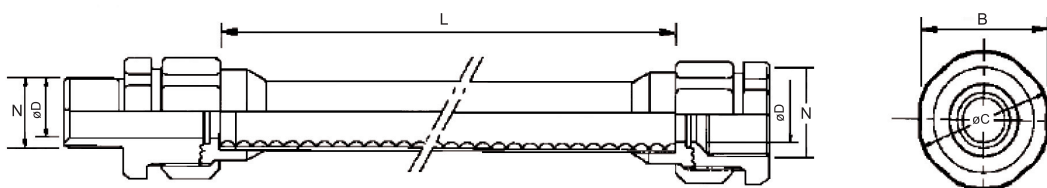

Zone	0	1	2	20	21	22
適用		V	V		V	V

產品名稱	萬均-耐壓防爆軟管
防爆等級	Ex d IIB ; Ex tb IIIB Db  UL Classified : E249174
防塵防水等級	IP66
材質	SUS304不鏽鋼編織軟管，兩端附銅鍍鎳內牙(F) 由任接頭或外牙(M)由任接頭
規格	1/2"NPT ~ 4"NPT，M20 ~ M75，長度400 mm ~ 1,000 mm

Series	Size and Threads		Length	Coupling
	1.1-1/2"NPT	1.4-M20	1- 400mm	B=F+M
	2.1-3/4"NPT	2.4-M25	2- 500mm	
	3.1-1"NPT	3.4-M32	3- 600mm	F=F+F
	4.1-1 1/4"NPT	4.4-M40	4- 700mm	
	5.1-1 1/2"NPT	5.4-M50	5- 800mm	M=M+M
	6.1-2"NPT	6.4-M63	6- 900mm	
	7.1-2 1/2"NPT	7.4-M75	7- 1,000mm	
	8.1-3"NPT			
	9.1-4"NPT			

型號	N	øD	B	L	由任接頭
WJXG45 -1.1-2	1/2"PT	14	34	500	外牙+內牙
WJXG45 -1.1-7	1/2"PT	14	34	1000	外牙+內牙
WJXG45 -1.1-1	1/2"NPT	14	34	400	外牙+內牙
WJXG45 -2.1-2	3/4"NPT	20	40	500	外牙+內牙
WJXG45 -3.1-2	1"NPT	26.5	48	500	外牙+內牙
WJXG45 -5.1-3	1-1/2"NPT	39	67	600	外牙+內牙
WJXG45 -6.1-4	2"NPT	51	80	700	外牙+內牙
WJXG45 -7.1-4	2-1/2"NPT	66	95	700	外牙+內牙
WJXG45 -8.1-6	3"NPT	78	109	900	外牙+內牙
WJXG45 -9.1-6	4"NPT	99	142	900	外牙+內牙